






UNIQUE:  
Screw lubrication  
during operation

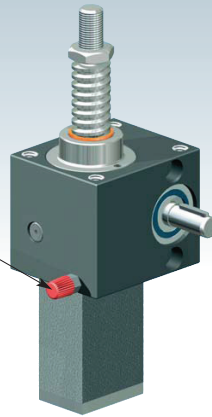

GSZ-2-S translating screw 2.5 kN

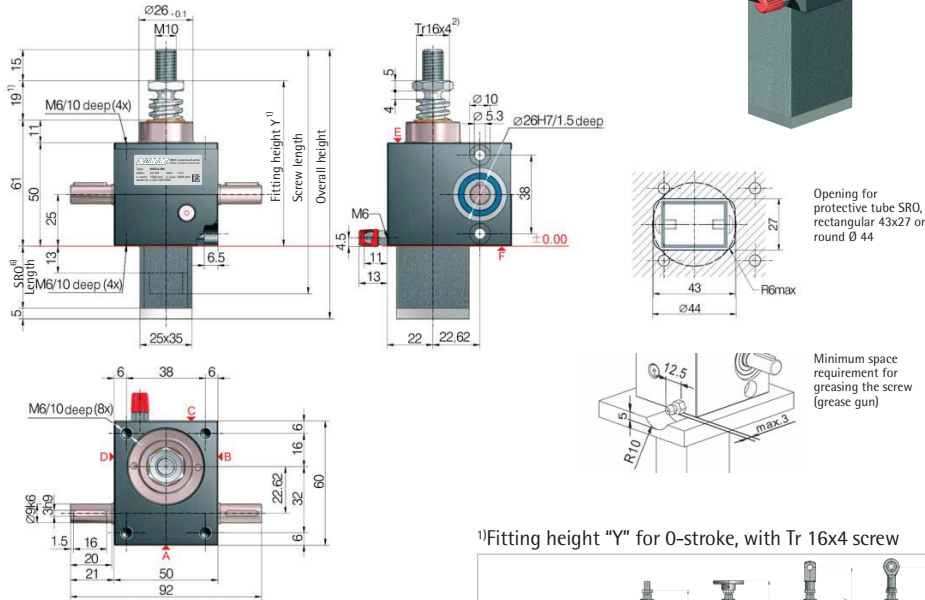

1) Fitting height "Y" for 0-stroke, with Tr 16x4 screw

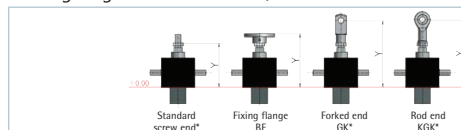

All dimensions in mm

Bel lows FB	Y	Y	Y	Y
without bellows FB	80	96	120	123
GSZ-2-FB-182	117	116	157	160
GSZ-2-FB-364	177	176	217	220

\*with bellows fixing ring Z-2-FBR

2) Protective tube length SRO with Tr 16x4 screw

Without escape/rotation protection	Escape/rotation protection	Rotation protection, with limit switch set ES	Rotation protection with ES and KAR*
47+stroke	62+stroke	117+stroke	139+stroke


\*Hinged bearing plate KAR, fitted on face F (below).

Standard ratios


Type	Version	Speed	Standard screw <sup>2)</sup>	i	Stroke per drive shaft rotation <sup>3)</sup>
GSZ-2-SN	Translating	Normal	Tr 16x4	4:1	1.00 mm
GSZ-2-SL	screw	Low speed		16:1	0.25 mm
GSZ-2-RN	Rotating	Normal	Tr 16x4	4:1	1.00 mm
GSZ-2-RL	screw	Low speed		16:1	0.25 mm

Screw jack mounting

max. load: 2.5 kN compressive and tensile load  
Screw: M6, strength class 8.8  
Screw-in depth: 8 to 10 mm  
Tightening torque: 8 Nm  
Screw locking: with Loctite 243



Duty cycle thermal limit, for S+R


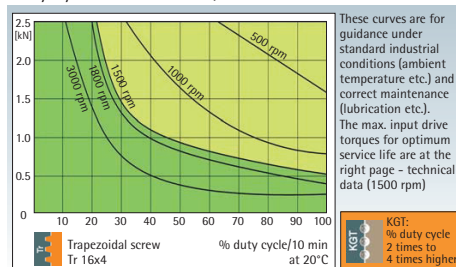


These curves are for guidance under standard industrial conditions (ambient temperature etc.) and correct maintenance (lubrication etc.). The max. input drive torques for optimum service life are at the right page - technical data (1500 rpm)


KGt: % duty cycle 2 times to 4 times higher



GSZ-2-R rotating screw 2.5 kN

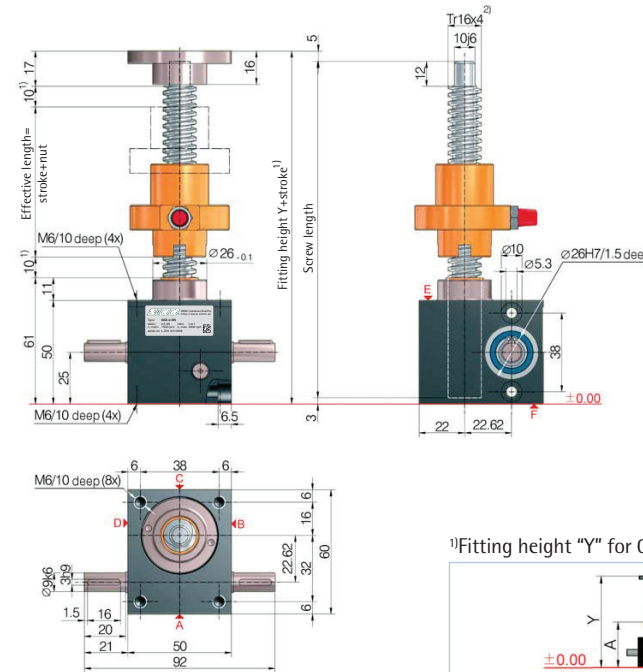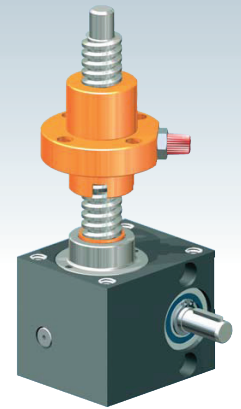

1) Fitting height "Y" for 0-stroke, with Tr 16x4 screw

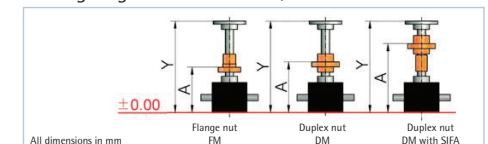

All dimensions in mm

Bel lows FB	Y/A	Y/A	Y/A
without bellows FB	132/83	142/96	167/121
2x GSZ-2-FB-182	-	198/124	220/146
2x GSZ-2-FB-364	-	318/184	340/206

Detailed instructions for determining the length can be found in Section 8

2.5 kN

Technical data series GSZ-2-S / GSZ-2-R

max. compressive/tensile force, static: 2.5 kN (250 kg)  
max. compressive/tensile force, dynamic: see duty cycle curves  
Nominal speed: 1500 rpm  
max. drive shaft speed: 3000 rpm (depending on the load and duty cycle)

Screw size standard: Tr 16x4<sup>2)</sup>  
Gear ratio: 4:1 (N) / 16:1 (L)  
Housing material: aluminium, corrosion-resistant  
Worm shaft: stainless steel, ground  
Weight of screw jack body: 0.6 kg  
Weight of screw/m: 1.21 kg  
Gearbox lubrication: synthetic fluid grease  
Screw lubrication: grease lubrication  
Gearbox operating temperature: max. 60°C, higher on request  
Moment of inertia: N: 0.081 kg cm<sup>2</sup> / L: 0.037 kg cm<sup>2</sup>  
Input torque (at 1500 rpm): max. 1.4 Nm (N) / max. 0.5 Nm (L)  
Drive-through torque: max. 9 Nm

Drive torque M<sub>0</sub> (Nm)  
Breakaway torque  
Idling torque<sup>4)</sup> M<sub>0</sub> (Nm)

Between gearbox and nut or nut and end of thread, provide for a safety distance of (minimum) 10 mm!  
See Section 7 for the checklist.

Important information  
1) - extension if a bellows is fitted: see the table or Section 8  
2) - Tr 16x4 is standard, also available: double-pitch, stainless steel, left-handed, increased screw Tr 18x4 (only for the R version)  
3) - factor includes efficiency, ratio and 30% safety  
4) - at 20°C, can be higher when new  
5) - for a 4 mm screw pitch