Z series - features

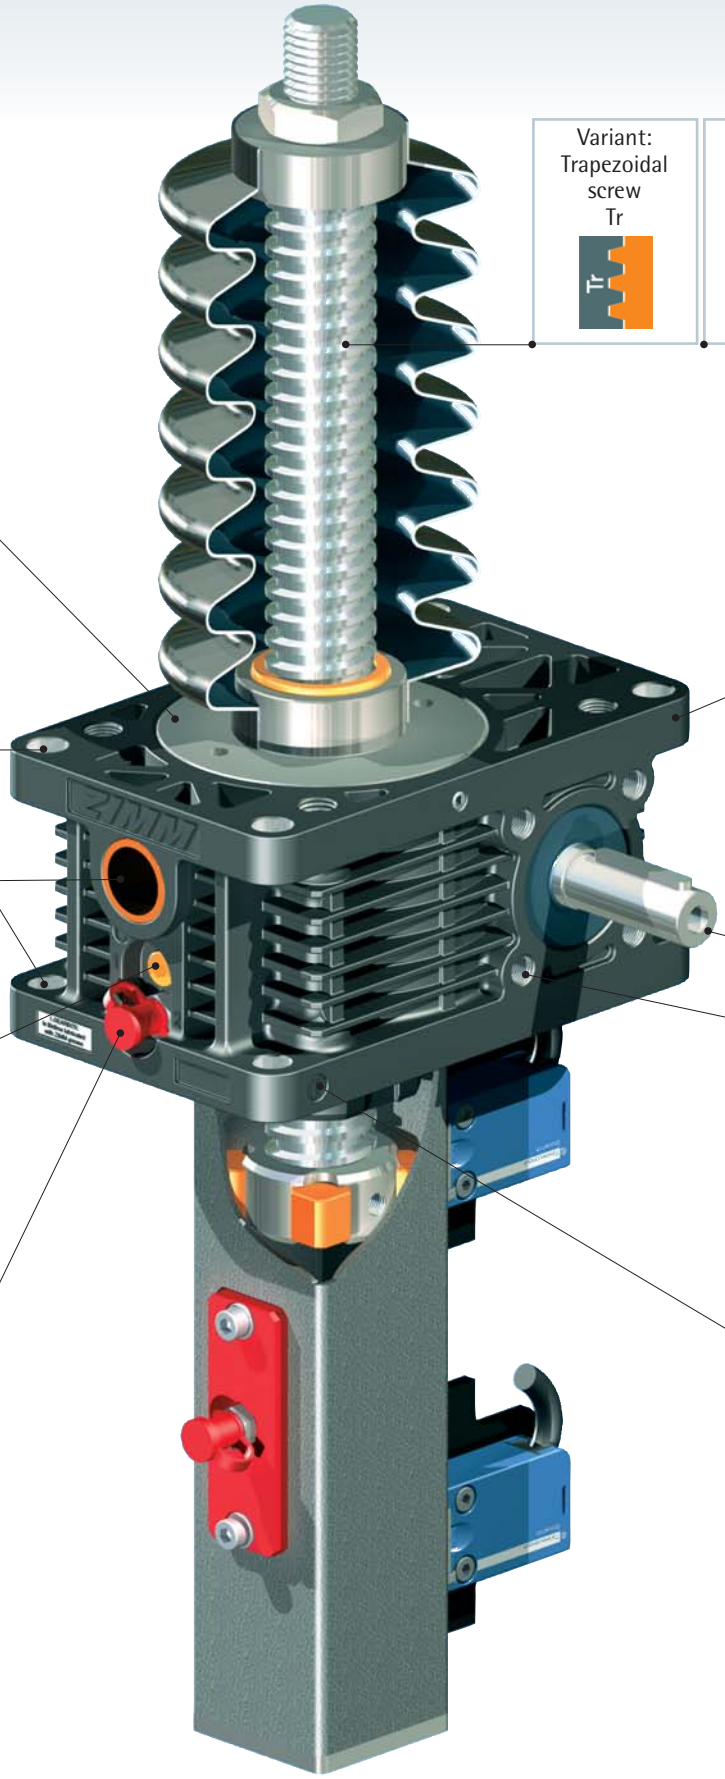

Sealed gearbox



Four mounting options

Integrated pivot bearing



Fluid grease in the gearbox permits high performance



Direct screw lubrication



Variant: Trapezoidal screw Tr

Variant: Safety nut SIFA

Variant: Ball screw KGT

Corrosion resistant

High-performance hardened and ground gears



Standard flange, simple and cost-effective

Side marking



ZIMM®
© by ZIMM Austria 2015

We have patents registered or pending for a range of functions and components.